


Honeywell North America Pricebook

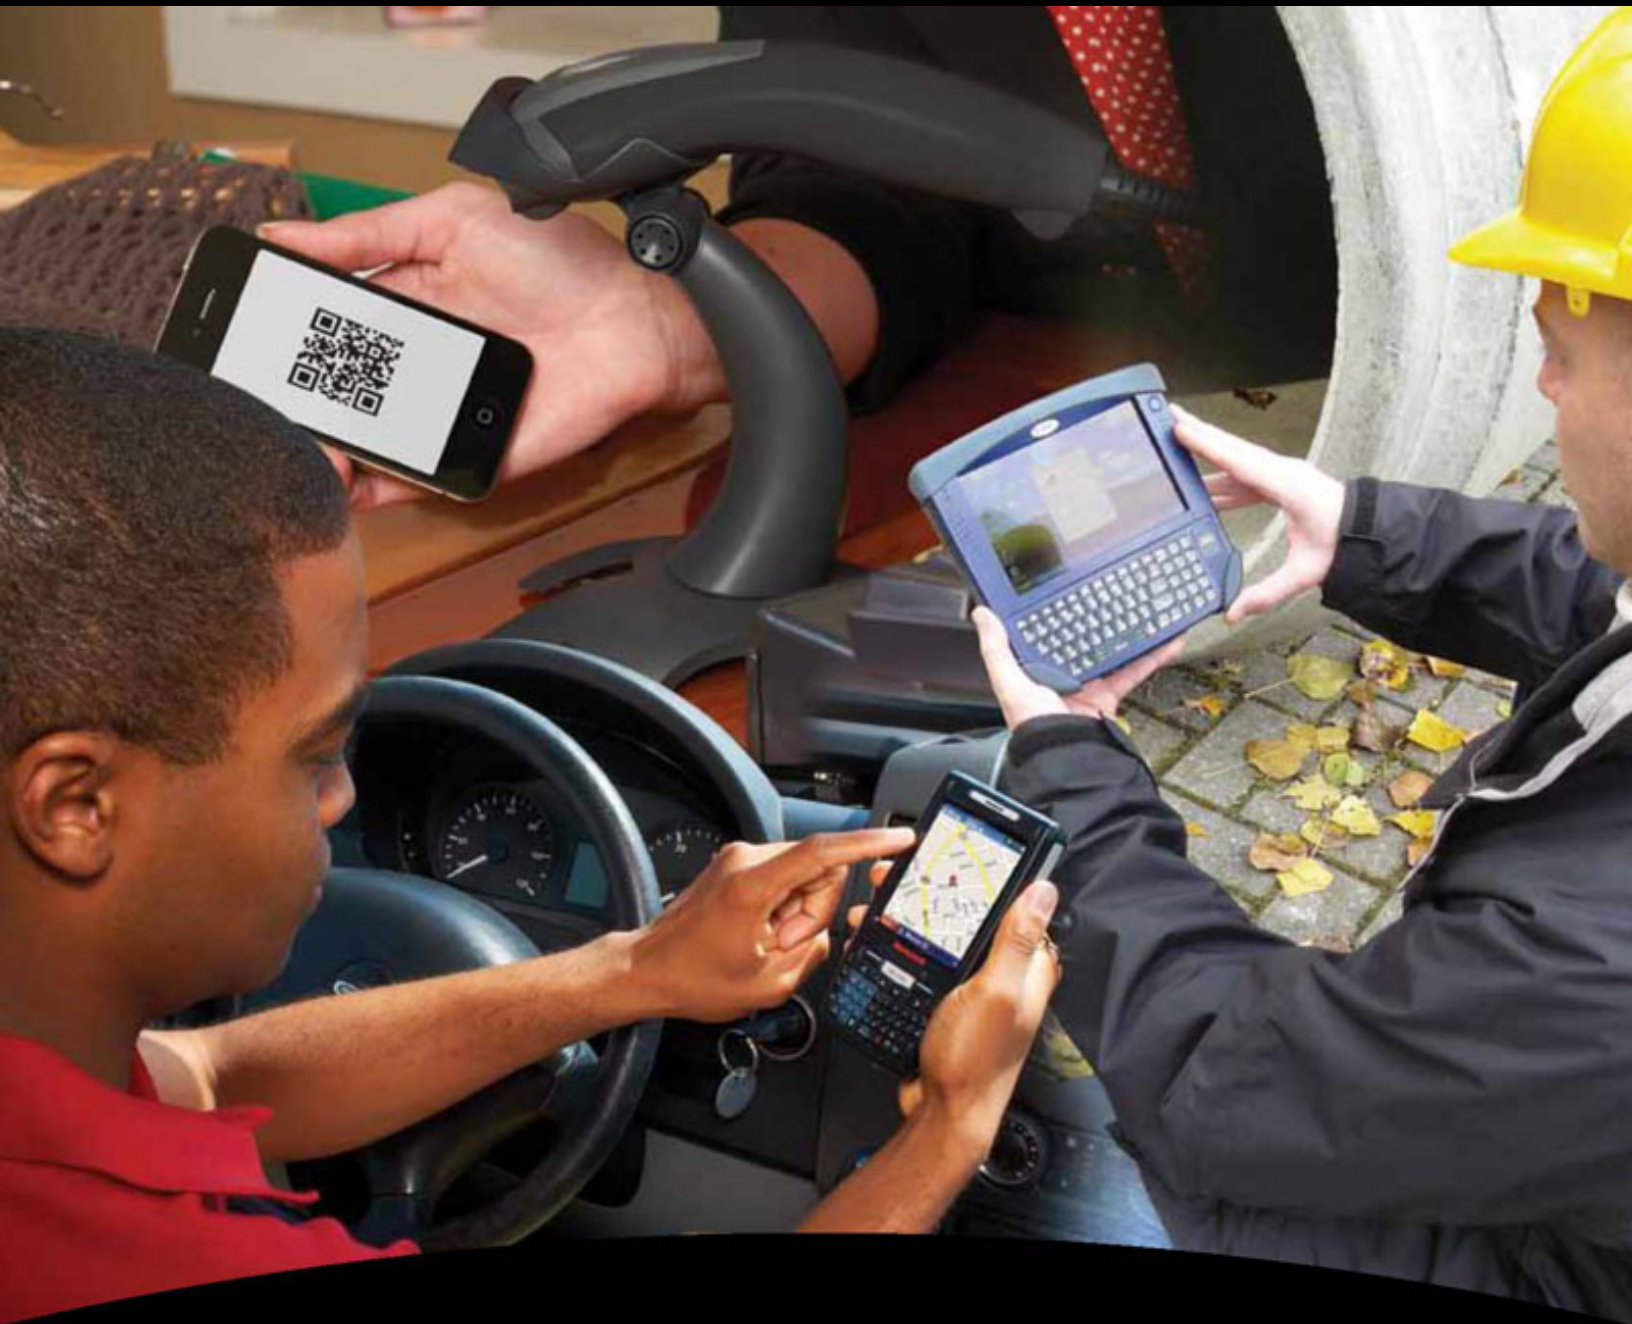

**Solutions that
Enable Productivity**

Honeywell

Honeywell Sales Policy Summary

The Honeywell Sales Order Policy is a reference guide within the price book as it relates to common definitions, terms and conditions.

Where existing signed contracts or order acknowledgements stipulate different terms and conditions, those documents preside.

Part numbers, or SKUs, are categorized by one of the four groups:

- **Stocking:** products have high sales run-rate, distributors should be stocking these
- **Standard:** products have moderate sales run-rate, discretion left to distributors on whether to stock
- **Non-Standard:** products are primarily project-based, discretion left to distributors on whether to stock
- **Custom:** products are unique to specific customers and only for sale to the identified customer

Ordering policies for each of the four categories are described below:

	Stocking	Standard	Non-Standard	Custom	Software
All SKUs					
Returnable	Yes	Yes	Non-returnable	Non-returnable	Non-returnable
Order Cancellation	+30 day notice	+30 day notice	Non-cancellable	Non-cancellable	Yes
Lead Time	15 days	30 days	30 days	Call for Quote	2 days
Scanning SKUs					
Min Order Quantity	Master Carton*	1 unit	1 unit		
Max Order Quantity	500 units	200 units	200 units	Call for Quote	
Mobility SKUs					
Min Order Quantity	10 units	1 unit	1 unit		
Max Order Quantity	100 units	50 units	50 units	Call for Quote	
All orders must meet the net minimum order value of \$1,500 or local currency equivalent.					
<ul style="list-style-type: none"> ● Lead times begin upon HSM receipt of PO and end upon shipment from HSM facility. ● All days are provided in business days (5 days = 1 calendar week). ● All returns are subject to the terms and conditions set forth by Honeywells Stock Rotation Policy. ● Order multiples must also be in master carton intervals for stocking scanning SKUs. ● Lead times apply only to order sizes less than the Max SKU Quantity. Call for lead time if quantity exceeds. 					

Customization Category	Product Family	Initial Quantity Requirements	Minimum Reorder Qty per Release
Custom SKUs			
Hardware Configuration (Defaults, firmware, kitting, labels, etc)	All Products	250 units - Year 1	50 units, OR Specified in custom SKU terms & conditions
Hardware Modification (housings, overlays, keypads, PCBs, etc)	All Products	1000 units - Year 1	Specified in custom SKU terms & conditions
New Cable	Cables	100 units - Year 1	100 units, OR Specified in custom SKU terms & conditions
<ul style="list-style-type: none"> ● Initial quantity requirements do not include quantities required for pilot test and acceptance by the customer. EWR must be submitted to develop a new Custom SKU. ● Minimum reorder quantities are reflective of Honeywells minimum order quantities with our suppliers and will vary based on level of customization. 			

Price Adjustments: Eligible price protection credit claims must be submitted in writing to Honeywell within thirty (30) days of the effective date of the pricing change. Eligible products must be current and saleable and claims must include a SKU inventory list specifying the number of units affected by the price decrease.

Honeywell Scanning & Mobility is a leading manufacturer of high-performance image- and laser-based data collection hardware, including rugged mobile computers and bar code scanners. Our product portfolio is one of the broadest in the AIDC industry, providing you with solutions for vertical markets such as retail; healthcare; and transportation and logistics. We complement our innovative products with advanced software, service and professional solutions that enable customers to effectively manage data and assets. Honeywell products are sold worldwide through a network of distributor and reseller partners. For more information, please visit www.honeywellaidc.com.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced or translated into another language without the prior written consent of Honeywell.

© Honeywell International Inc. All rights reserved.

Captuvo, Eclipse, Voyager, VoyagerGS, Fusion, Orbit, OrbitCG, QuantumT, InVista, Solaris, Horizon, Genesis, Vuquest, Stratos, StratosH, ScanPal2, Optimus, OptimusS, CodeSelect, CodeGate, CodeSense, TotalFreedom, StratosSYNC, StratosSWAP, EasyDL, Omniplanar, SwiftDecoder, SwiftJPEG, SwiftDimension, SwiftOCR and SwiftVerify are the intellectual property of Metrologic Instruments, Inc. Dolphin, Quick Check, Service Made Simple, Shift-PLUS and Adaptus are the intellectual property of Hand Held Products. Xenon is the intellectual property of Honeywell. All other product or service names are the property of their respective owners.

Cables - All Cables

Accessories - Cables

SKU	SKU Type	SKU Description	List (\$)
42203758-01E	Non standard	Cable: RS232 TTL, Power on Pin 9, TX Data on Pin 2 Connector: D 9 PIN M Length: 7.7 ft. (2.4m), coiled	47.25
42203758-02E	Non standard	Cable: RS232 TTL EP Connector: 9 Pin D 9 PIN F, 4 Pin Mini Din Length: 7.7 ft. (2.4m), coiled	63.00
42203758-03E	Non standard	Cable: RS232 TTL, Connector: D 9 Pin F, power on pin 9, TX data on pin 2, coiled Length: 7.7ft. (2.3m)	63.00
42203758-03SE	Non standard	Cable: RS232 TTL, Connector: D 9 Pin F, power on pin 9, TX data on pin 2, straight Length: 7.7ft. (2.3m)	18.90
42203758-04E	Non standard	Cable: RS232 TTL, Connector: D 9 Pin F connector, TX data on pin 2, external power, coiled Length: 7.7ft. (2.3m)	18.90
42203758-06E	Non standard	Cable: RS232 TTL, 9 F EP 15, D 9 PIN F, Mini Din 4 PIN Length: 7.7 ft. (2.3m), coiled	76.65
42203764-03E	Non standard	Cable: Wand Emulation, Power on Pin 9 Connector: D 9 PIN Squeeze Length: 7.7 ft. (2.3m), coiled	39.90
42203764-04E	Non standard	Cable: Wand Emulation, power on Pin 4 Connector: D 9 PIN Squeeze Length: 6.8 ft. (2.0m), coiled	36.75
42204064-01E	Non standard	Cable: IBM 3151.3471.3472, Connector: Modular 8 PIN M/F Length: 8.5 ft. (2.6m), coiled	67.20
42204253-01E	Non standard	Cable: RS232, Power on Pin 9, TX Data on Pin 2 Length: 7.7 ft. (2.4m), coiled	36.75
42204253-03E	Non standard	Cable: RS232, power on Pin 9, TX Data on Pin 2 Connector: D 9 PIN F Length: 7.7 ft. (2.4m), coiled	99.75
42204253-04E	Non standard	Cable: RS232, black, TX Data on Pin 2 Connector: D 9 PIN F and Mini Din 4 PIN F, 2.3m (7.7), coiled, external power	63.00
42204253-05E	Non standard	Cable: RS232, black, TX Data on Pin 2 Connector: D 9 PIN F and Mini Din 4 PIN F, 5.0m (16.3), coiled, external power	63.00
42204253-22E	Non standard	Cable: RS232, black, TX Data on Pin 2 Connector: D 9 PIN M/F and Mini Din 4 PIN F, 6.8m (22.3), coiled, external power	131.25
42204841-01E	Non standard	Cable: direct connect, Connector: Mini Din 6 PIN M Length: 7.7 ft. (2.3m), coiled	49.35
42204906-01E	Non standard	Cable: 55/30 extender Cable: Connector: Modular 8 PIN M/F, coiled	30.45
42204933-01E	Non standard	Cable: Wand Emulation, Connector: Din 5 PIN M (w/ lock) Length: 6.8 ft. (2.1m), coiled	63.00
42205021-01E	Non standard	Cable: AT - PS/2 & Compatibles, EP, wedge (3.0ft, .91m), straight	18.90
42205155-02E	Non standard	Cable: IBM 46xx, black, RS485 Port 9A/B, 3.7m (12.2), coiled, Connector: SDL 4 PIN A Key	63.00
42205155-04E	Non standard	Cable: IBM 46xx, black, RS485 Port 9A/B, 7.0m (23.0), coiled	63.00
42205155-05E	Non standard	Cable: IBM 46xx, black, RS485 Port 9A/B, 3.1m (10.2), coiled	18.90
42205626-03E	Non standard	Cable: RS232, black, DB9, 2.3m (7.7), external power, coiled	63.00
42205895-01E	Non standard	Cable: RS232 TTL, black, coiled, 2.3m (7.7), power from PS-2 keyboard/mouse port	63.00
42205910-04E	Non standard	Cable, RS-232, EP Connector: 9 PIN D F Length: 4.2 ft. (1.3m), straight	39.90
42205978-01E	Non standard	Cable: HHLC/laser emulation Connector: D 9 PIN Squeeze Length: 6.8 ft. (2.0m), coiled	63.00
42206090-01E	Non standard	Cable: RS232 TTL out Mod 8 Pin M Length: 7.7 ft. (2.4m), straight	63.00
42206092-01CE	Non standard	Cable: AT - PS/2 & compatibles ESD/cleaned, wedge Connector: Mini Din 6 PIN M/F Length: 7.0 ft. (2.1m)	201.60
42206132-01E	Non standard	Cable: AT - PS/2 & compatibles wedge, EP, Connector: Mini Din 6 PIN F Length: 15.5 ft. (4.7m), straight	131.25
42206132-02E	Standard	Cable: AT - PS/2 & compatibles, wedge Connector: Mini Din 6 PIN M/F Length: 9.2 ft. (2.8m), coiled	18.90
42206132-02SE	Non standard	Cable: AT - PS/2 & compatibles, wedge Connector: Mini Din 6 PIN M/F Length: 9.2 ft. (2.8m), straight	18.90
42206132-03E	Non standard	Cable: AT - PS/2 & compatibles wedge, EP Connector: Mini Din 4 PIN F Length: 9.2 ft. (2.8m), straight	60.90
42206161-01E	Standard	Cable: USB, black, Type A, 2.6m (8.5), straight, host power	11.55
42206162-01E	Non Standard	Cable: USB, black, 12V locking, 2.6m (8.5), straight, host power	131.25
42206200-01E	Non Standard	Cable: coiled direct connect 3800-11 connector Connector: Din 7 PIN M (with lock) Length: 15.7 ft. (4.8m)	131.25
42206202-01E	Non standard	Cable: USB, black, secondary interface Length: 9.2 ft. (2.8m), coiled	36.75
42206202-02E	Standard	Cable: USB, black, Type A, 2.8m (9.2), coiled, host powered	18.90
42206212-02E	Non Standard	Cable: Combo kit with resistor Connector: Mini Din or Din PCs and PS/2 Length: 9.2 ft. (2.8m)	36.75
42206236-01E	Non standard	Cable: 3800 Direct Connect Length: 7.7 ft. (2.4m), coiled	63.00
42206287-01E	Non standard	Cable: RS232 TTL, power on Pin 9 + 12 VDC Connector: D 9 PIN F Length: 7.7 ft. (2.3m), coiled	36.75
42206301-01E	Non standard	Cable: RS232 serial out, coiled	36.75
42206338-01E	Non standard	Dolphin Series straight USB charging and communications cable	110.25
42206339-01E	Non standard	Dolphin Series RS-232 charging and communications cable	110.25
42206416-01E	Non standard	Cable: USB, black, Type A, coiled, 2.6m (8.5), external power	63.00
42206422-01E	Non standard	Cable: RS232 TTL, black, DB9, 2.3m (7.7), straight, 5v external power	36.75
42206431-01E	Standard	Cable: USB, black, Type A, 3.4m (11.1) coiled, host power (Use w/3800VHD-ESD-12E. Not compatible with 3800g)	63.00
42206433-01E	Non standard	Cable: USB,+5V, 8.5FT, straight cable ending in right angle (8.5ft, 3.7m)	36.75
52-52511	Non standard	Cable: Checkpoint EAS, 0.6m (2.0), straight	11.55
52-52556	Non standard	Cable: Checkpoint EAS, 1.8m (6.0), straight	11.55
52-52557-3-FR	Non standard	Cable: RS232, black, DB9, 5V, 2.9m (9.5) straight	11.55
52-52558-3-FR	Non standard	Cable: KBW, black, 3.0m (9.8), coiled, 5V external power with ferrite	18.90
52-52559-3-FR	Non standard	Cable: USB, black, Type A, straight, 5V external power with ferrite	11.55
52-52559-N-3-FR	Non standard	Cable: USB, black, Type A, 5V, 2.9m (9.5) straight	11.55
52-52561-3-FR	Non standard	Cable: USB, black, Type A, 5V, 2.9m (9.5) straight, External IO	18.90
52-52562-3-FR	Non standard	Cable: RS232, black, DB9, 5V, 2.9m (9.5) straight, External IO	18.90
52-52828-3	Non standard	Cable: USB, black, Type A to Type B	11.55
53-53000-3	Non standard	Cable: RS232, black, DB9 female, 2.9m (9.5), coiled, 5V external power	11.55
53-53000-N-3	Non standard	Cable: RS232, black, DB9 female, 2.9m (9.5), coiled, host power	11.55
53-53002-3	Non standard	Cable: KBW, black, 2.9m (9.5), coiled, 5V external power	18.90
53-53002-N-3	Non standard	Cable: KBW, black, 2.9m (9.5), coiled, host power	18.90
53-53004-12	Non standard	Cable: RS232 Aux, gray, RJ45, 3.8m (12.5), coiled, 5V external power	18.90
53-53004-N-3	Non standard	Cable: RS232 Aux, black, RJ45, 2.9m (9.5), coiled, host power	18.90
53-53014-3	Non standard	Cable: RS232, black, 2.9m (9.5), coiled, 5V external power	18.90

53-53020-3	Non standard	Cable: Single keyboard cable, black, 2.9m (9.5), coiled, 5V external power	18.90
53-53020-N	Non standard	Cable: Single keyboard cable, black, 2.9m (9.5), coiled, host power	11.55
53-53068-N-3	Non standard	Cable: USB, black, 5V Locking, 3.9m (12.8), coiled, host power	36.75
53-53089-3	Non standard	Cable: RS232, black, 2.9m (9.5), coiled, 5V external power	18.90
53-53124-3	Non standard	Cable: RS232, black, DB9 female, 3.7m (12.1), coiled, 5V external power	18.90
53-53125-3	Non standard	Cable: RS232, black, DB9 female, 6.1m (20.0), coiled, 5V external power	18.90
53-53153-N-3	Non standard	Cable: RS232 Wincor, black, DB9 male, 2.9m (9.5), coiled, host power	11.55
53-53213-N-3	Non standard	Cable: USB, black, 12V locking, 2.9m (9.5), coiled, host power	36.75
53-53213-N-3-FR	Non standard	Cable: USB, black, 12V locking, 2.9m (9.5), coiled, host power with ferrite	36.75
53-53235-3	Non standard	Cable: USB, black, Type A, 2.9m (9.5), coiled, 5V external power	11.55
53-53235-N-3	Non standard	Cable: USB, black, Type A, 2.9m (9.5), coiled, host power	18.90
53-53235-N-3-FR	Non standard	Cable: USB, black, Type A, 2.9m (9.5), coiled, host power with ferrite	11.55
53-53283-N-3	Non standard	Cable: USB, black, Type A, 3.8m (12.5), coiled, host power	18.90
53-53283-N-3-15	Non standard	Cable: USB, black, Type A, 4.6m (15.1), coiled, host power	18.90
53-53290-N-3	Non standard	Cable: RS232, black, DB9 male, 3.9m (12.8), coiled, host power	18.90
53-53802-N-3	Non standard	Cable: KBW, black, 2.9m (9.5), coiled, host power	18.90
53-53809-N-3	Non standard	Cable: USB, black, Type A, 2.9m (9.5), coiled, host power	11.55
53-53809-N-3-16	Non standard	Cable: USB, black, Type A, 4.9m (16.0), coiled, host power	18.90
54-54073-3	Non standard	Cable: Y type BT FS USB plug connector, straight	36.75
54-54165-3	Non standard	Cable: USB, black, Type A, straight, 5V external power	11.55
54-54667-14	Non standard	Cable: RS232 LSO, gray, 4.3m (14), straight, 5V external power	18.90
55-55000-3	Non standard	Cable: RS232, black, DB9 female, 2.9m (9.5), coiled, 5V external power	11.55
55-55002-3	Non standard	Cable: KBW, black, 2.4m (7.9), straight, 5V external power	18.90
55-55165-3	Non standard	Cable: USB, black, Type A, 1.5m (4.9), straight, 5V external power	18.90
55-55235-N-3	Non standard	Cable: USB, black, Type A, 2.9m (9.5), straight, host power	11.55
55-55535-N-3	Non standard	Cable: KBW, black, Type A, 1.9m (5.7), straight, host power	11.55
55-55809-N-E-3	Non standard	Cable: USB, black, Type A and 2 wire pigtail, straight, host power with EAS	18.90
57-57000-N-3	Non standard	Cable: RS232, black, DB9 female, 3.6m (11.8), straight, no power	18.90
57-57004-N-3	Non standard	Cable: IBM 46xx, black, 4-pin SDL, straight, no power	18.90
57-57006-N-3	Non standard	Cable: USB, black, Type A, 3.6m (11.8), straight, no power	11.55
57-57008-N-3	Non standard	Cable: StratosSchool, RS232 Aux, black, straight, host power	36.75
57-57099-3	Non standard	Cable: RS232 Aux, black, 10-pin RJ45, 2.9m (9.5), straight, host power (voyager/eclipse)	11.55
57-57099-3-12	Non standard	Cable: RS232 Aux, black, 10-pin RJ45, 3.7m (12), straight, host power (voyager/eclipse)	11.55
57-57200-N-3	Non standard	Cable: USB, black, 12V locking, 2.7m (8.9), straight, no power with ferrite	36.75
57-57201-N-3	Non standard	Cable: USB, black, Type A, 4.0m (13.1), straight, no power with ferrite	11.55
57-57210-N-3	Non standard	Cable: RS232, black, DB9 female, 3.6m (11.8), straight, no power	11.55
57-57227-N-3	Non standard	Cable: USB, black, 12V locking, 4.0m (13.1), straight, no power	36.75
58-58056-N-3	Non standard	Cable: SING END,2 FT,KB	11.55
59-59000-3	Non standard	Cable: RS232, black, DB9, 2.9m (9.5), straight, 5V external power	11.55
59-59002-3	Non standard	Cable: KBW, black, 2.4m (7.9), straight, 5V external power	18.90
59-59002-N-3	Non standard	Cable: KBW, black, 2.4m (7.9), straight, host power	18.90
59-59014-FR	Non standard	Cable: RS232 MetroSet cable, gray, straight, 5V external power with ferrite	11.55
59-59084-N-3	Non standard	Cable: USB, black, Type A, 2.9m (9.5), straight, host power	11.55
59-59194-N-3-14	Non standard	Cable: RS232, black, 4.3m (14.1), straight, host power	18.90
5S-5S213-N-3	Non standard	Cable: USB, black, 12V locking, 2.9m (9.5), straight, host power	18.90
7600-RS232 E	Non standard	Dolphin 7600 RS-232 charging and communications cable	44.10
7600-USB E	Non standard	Dolphin 7600 USB charging and communications cable	44.10
CBL-020-300-C00	Standard	Cable: RS232 (5V signals), black, DB9 Female, 3m (9.8), coiled, 5V external power with option for host power on pin 9	18.90
CBL-120-300-C00	Non standard	Cable: RS232C (+/-12V signals), black, DB9 Female, 3m (9.8), coiled, 5V external power with option for host power on pin 9	36.75
CBL-220-300-C00	Non standard	Cable: RS232 (+5V signals), black, DB9 Male, 3m (9.8), coiled, external power with option for host power on pin 9 for connection to Wincor Beetle	18.90
CBL-420-300-C00	Non standard	Cable: RS232 (5V signals), Honeywell Bioptic Stratos Aux, black, 10 pin modular, 3m (9.8), coiled, host power possible (dependent upon scanner and Stratos models)	18.90
CBL-431-300-S00	Non standard	Cable: RS232 (+/-12V signals), Verifone Ruby, Sapphire and Topaz Terminals, black, 8 pin modular; straight, host power on pin 8	63.00
CBL-500-300-C00	Standard	Cable: USB, black, Type A, 3m (9.8), coiled, 5V host power	18.90
CBL-500-300-S00	Standard	Cable: USB, black, Type A, 3m (9.8), straight, 5V host power	18.90
CBL-500-500-C00	Standard	Cable: USB, black, Type A, 5m (16.4), coiled, 5V host power	18.90
CBL-503-300-C00	Non standard	Cable: USB, black, 12V locking, 3m (9.8), coiled, 5V host power	18.90
CBL-503-500-C00	Stocking	Cable: USB, black, 12V locking, 5m (16.4), coiled, 5V host power	36.75
CBL-600-400-C00	Non standard	Cable: IBM 46xx Port 9b, 12V Power, coiled, 4m (13.1)	63.00
CBL-720-300-C00	Non standard	Cable: KBW, black, PS2, 3m (9.8), coiled, 5 V external power with option for host power	18.90
CBL-GIL-300-S00-02	Non standard	Cable: RS232 (5V signals), Gilbarco terminal, black, DB9 Female, 3m (9.8), straight	18.90
CBL-NCR-300-S00	Non standard	Cable: RS232 (5V signals), NCR 787x, black, 8 pin modular, 3m (9.8), straight, external power with option for 5V host power on pin 1	18.90
MVC-3FPS-VR	Non standard	Cable: Verifone-Ruby, black, 8-pin Mod, 0.6m (2.1), straight, host power	63.00
MVC-3MPC-IB9	Non standard	Cable: IBM 46xx, black, Port 9 4-pin SDL, 3.1m (10.2), coiled, 9V host power	36.75
MVC-3MPC-VR	Non standard	Cable: Verifone-Ruby, black, 8-pin Mod, 3.3m (10.7), coiled, host power	63.00
MVC-3MPC-VR3750	Non standard	Cable: Verifone-Ruby 3750 Terminal, black, 8-pin Mod, 3.5m (11.5), coiled, host power	36.75

MVC-3MPS-VR	Non standard	Cable: Verifone-Ruby, black, 8-pin Mod, 2.3m (7.4), straight, host power	63.00
MVC-3MPS-VR3750	Non standard	Cable: Verifone-Ruby 3750 Terminal, black, 8-pin Mod, 2.3m (7.4), straight, host power	36.75
MX-232C-153-3	Non standard	Cable: RS232, black, DB9 male, 2.9m (9.5), straight, host power with TTL to 12V converter	36.75

Accessories - Special Order Cables - non-returnable (Please contact your sales representative for pricing and lead time)

SKU	SKU Type	SKU Description	List (\$)
42206300-01E	Non standard	Cable, RS-232 TTL output, Connector: D 9 PIN M Length: 7.7 ft. (2.4m), coiled	63.00

Accessories - Cables

SKU	SKU Type	SKU Description	List (\$)
80000355E	Non standard	6 ft. (1.8m) USB Cable	37.80
CBL-320-300-C00	Non standard	Cable: RS232 (+/-12V signals), black, DB9 Male, 3m (9.8), coiled, external power with option for host power on pin 9	18.90
CBL-503-300-S00	Non standard	Cable: USB, black, 12V locking, 3m (9.8), straight, 5V host power	36.75
77900910E	Non standard	6 ft. (1.8m) RS-232 Cable	36.00
9000052CABLE	Non standard	CABLE, COMBO, 1FT, USB MASTER, ETHRNT, D15 TO RJ45 AND USB-A	129.00
9000054CABLE	Non standard	CABLE, 12 FT, INPUT POWER	107.00
9000063CABLE	Non standard	CABLE, 6 FT, UPS BATTERY, REMOTE	107.00
9000072CABLE	Non standard	CABLE, COMBO, 1FT, DUAL PS2 ADAPTR, D9 TO DUAL MIN-DIN	64.00
9000075CABLE	Non standard	CABLE, COMBO, 1FT, VX6-VX7 D15 TO RJ45, USB-A, USB-A PLUG	129.00
9000076CABLE	Non standard	MX3Plus Headset coiled adapter cable, includes quick disconnect headset connector to a 2.5 mm audio jack. A headset is still required.	70.00
9000077CABLE	Non standard	CABLE, 1 FT, ADAPTR, POWER, VX1, VX2, VX4, VX6, VX7	107.00
9000A054CBL6D9D9	Non standard	Cable, Serial Null Modem, PC, D9F to D9F, 6ft, ActiveSync	64.00

Accessories - Carrying accessories

SKU	SKU Type	SKU Description	List (\$)
8300051CABLE	No SKU code	8FT POWERSCAN CABLE, D9F	64.00
9000A408HIPFLIP	Non standard	Hip-flip for use with Belt	79.00

Accessories - Batteries & Chargers

SKU	SKU Type	SKU Description	List (\$)
9000A377CHGR5US	Non standard	5 Unit Charger / Analyzer, US	1289.00
9000A377CHGR5WW	Non standard	5 Unit Charger / Analyzer, WW, (C14 type power cord required)	1289.00

Accessories - Power Supplies

SKU	SKU Type	SKU Description	List (\$)
9000A301PSACUS	Non standard	AC Power Supply, US, trickle charger	64.00
9000A317PSACUS-R	Non standard	PWR SUPPLY, 100-250VAC, US CORD	451.00
9000A318PSACWW-R	Non standard	PWR SUPPLY, 100-250VAC, C14 TYPE POWER CORD REQUIRED	451.00

Accessories - Antennas

SKU	SKU Type	SKU Description	List (\$)
9000282ANTENNA	Non standard	Remote Antenna Mounting and Cable Kit 802.11a/b/g, 6ft	179.00
9000283ANTENNA	Non standard	Remote Antenna Mounting and Cable Kit 802.11a/b/g, 8ft	243.00
9000284ANTENNA	Non standard	Rt. Angle Remote Antenna Mounting and Cable Kit 802.11a/b/g, 6ft	179.00
9000A286XANTBG	Non standard	802.11b/g (2.4GHz) Whip Antenna	56.00

Note: Global Services contracts availability varies per region. Services such as Service Made Simple (SMS) are available in the EU, USA & Canada. For countries outside of the EU, USA & Canada, please contract a Honeywell representative to confirm availability.

Prices are recommended resell prices only. HSM Distributors and Partners are free to define their own prices.

Honeywell official pricelist is the one regularly updated and published on this site.

All prices are subject to change without notice and will be confirmed upon reception of orders.

For more information on our products:
www.honeywellaidc.com

Honeywell Scanning & Mobility
9680 Old Bailes Road
Fort Mill, SC 29707
800.582.4263
www.honeywell.com

Honeywell